


IN THE SPECIFICATION

Please replace the second full paragraph at page 6 of the Specification with the paragraph provided below:

The PPE resin compositions of the present invention preferably contain at least one elastomeric or nonelastomeric polymer of an alkenylaromatic compound. Suitable polymers of this type may be prepared by methods known in the art including bulk, suspension and emulsion polymerization. They generally contain at least about 25% by weight of structural units derived from an alkenylaromatic monomer of the formula (II):

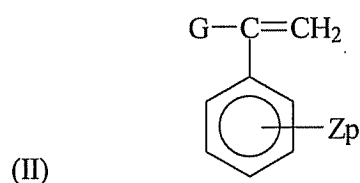

wherein G is hydrogen, lower alkyl or halogen; Z is vinyl, halogen or lower alkyl; and p is from 0 to 5. These resins include homopolymers of styrene, chlorostyrene and vinyltoluene, random copolymers of styrene with one or more monomers illustrated by acrylonitrile, butadiene, α -methylstyrene, ethylvinylbenzene, divinylbenzene and maleic anhydride, and rubber-modified polystyrenes comprising blends and grafts, wherein the rubber is a polybutadiene or a rubbery copolymer of about 98-68% styrene and about 2-32% diene monomer. These rubber modified polystyrenes include high impact polystyrene (commonly referred to as HIPS). Non-elastomeric block copolymer compositions of styrene and butadiene can also be used that have linear block, radial block or tapered block copolymer architectures. They are commercially available from such companies as Fina Oil as under the trademark FINACLEAR and Phillips under the trademark K-RESINS.